

S1F77330 Series

EPSON
EXCEED YOUR VISION

Power Bus Switch IC 2 to 1 Bus Switch

■ OVERVIEW

The S1F77330 series is the bus switch suitable for USB applications. The adopted CMOS process technology characterizes the S1F77330 series by low power consumption. The compact WCSP adopted for the package enables the S1F77330 series to be mounted on high-density assemblies.

The built-in level shift circuit eliminates the need of external level shift circuitry for the input to this IC.

■ FEATURES

- Input voltage range : 3.0V to 3.6V
- Low-current consumption : 14 μ A (MAX)
- Static current : 1 μ A (MAX)
- Bus switch ON resistance : 6.0 Ω (typ)
- Bus switch pin capacity (D system) : 2.7pF (typ)
- Bus switch pin capacity (D* system) : 1.45pF (typ)

■ APPLICATION

- Mobile communication equipment (mobile phones, cordless phones, and wireless communication devices)
- Mobile AV equipment
- Home appliances
- Cameras, and video equipment
- Portable game devices
- Battery-based equipment

■ PACKAGE

- S1F77330M0A : PLP-10 (2.50mm $\times$ 2.70mm)
- S1F77330B0A : WCSP-10 (1.118mm $\times$ 1.625mm)

S1F77330 Series

■ APPLICATION CIRCUIT EXAMPLE


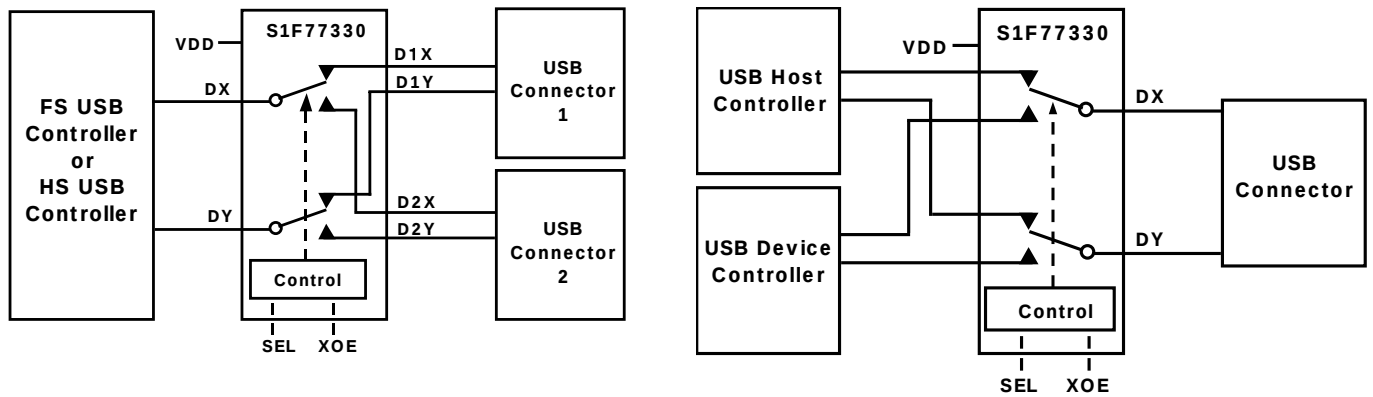


Fig.1 Application Circuit Example

S1F77330 Series

■ PIN ASSIGNMENT (S1F77330M0A)

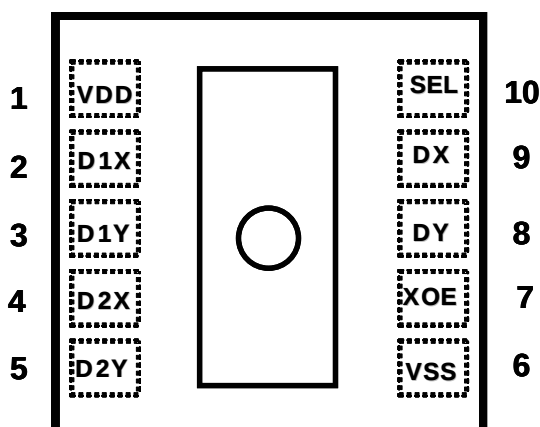

(Top view)

Fig.2 Pin Assignment

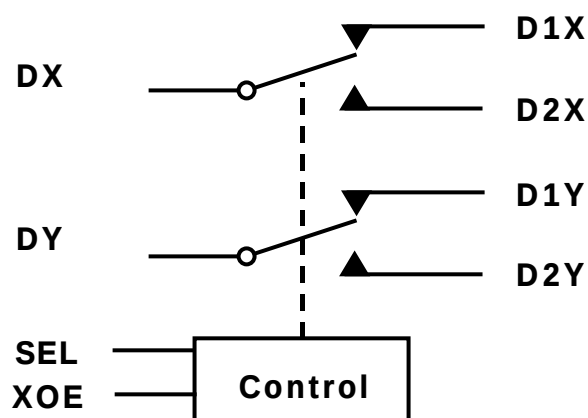


Fig.3 Bus switch symbol

■ PIN DESCRIPTION (S1F77330M0A)

Pin No.	Pin Name	Pin Description
1	VDD	Power supply pin
2	D1X	Data port 1 (X)
3	D1Y	Data port 1 (Y)
4	D2X	Data port 2 (X)
5	D2Y	Data port 2 (Y)
6	VSS	GND pin
7	XOE	Bus switch enable input pin
8	DY	Data port COM(Y)
9	DX	Data port COM(X)
10	SEL	Switch select input pin

■ TRUTH TABLE (S1F77330M0A)

SEL	XOE	Bus Switch status
X	HIGH	Disconnected
LOW	LOW	DX = D1X, DY = D1Y
HIGH	LOW	DX = D2X, DY = D2Y

S1F77330 Series

PIN ASSIGNMENT (S1F77330B0A)

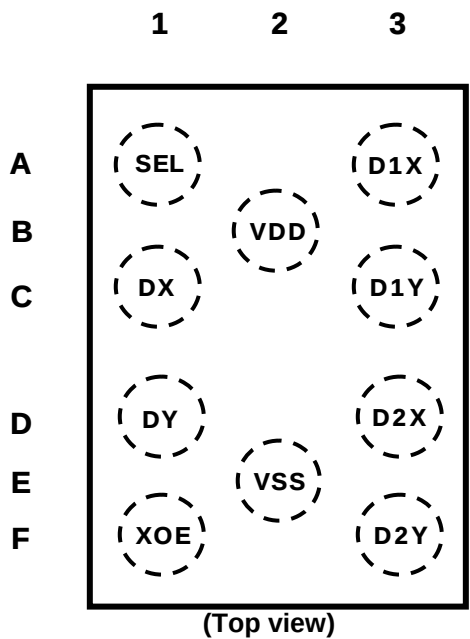


Fig.2 Pin Assignment

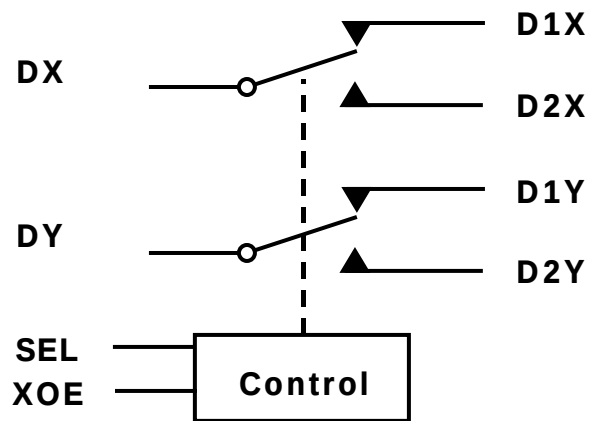


Fig.3 Bus switch symbol

PIN DESCRIPTION (S1F77330B0A)


Pin No.	Pin Name	Pin Description
A1	SEL	Switch select input pin
C1	DX	Data port COM(X)
D1	DY	Data port COM(Y)
F1	XOE	Bus switch enable input pin
E2	Vss	GND pin
F3	D2Y	Data port 2 (Y)
D3	D2X	Data port 2 (X)
C3	D1Y	Data port 1 (Y)
A3	D1X	Data port 1 (X)
B2	Vdd	Power supply pin

TRUTH TABLE (S1F77330B0A)

SEL	XOE	Bus Switch status
X	HIGH	Disconnected
LOW	LOW	DX = D1X, DY = D1Y
HIGH	LOW	DX = D2X, DY = D2Y

S1F77330 Series

■ BLOCK DIAGRAM

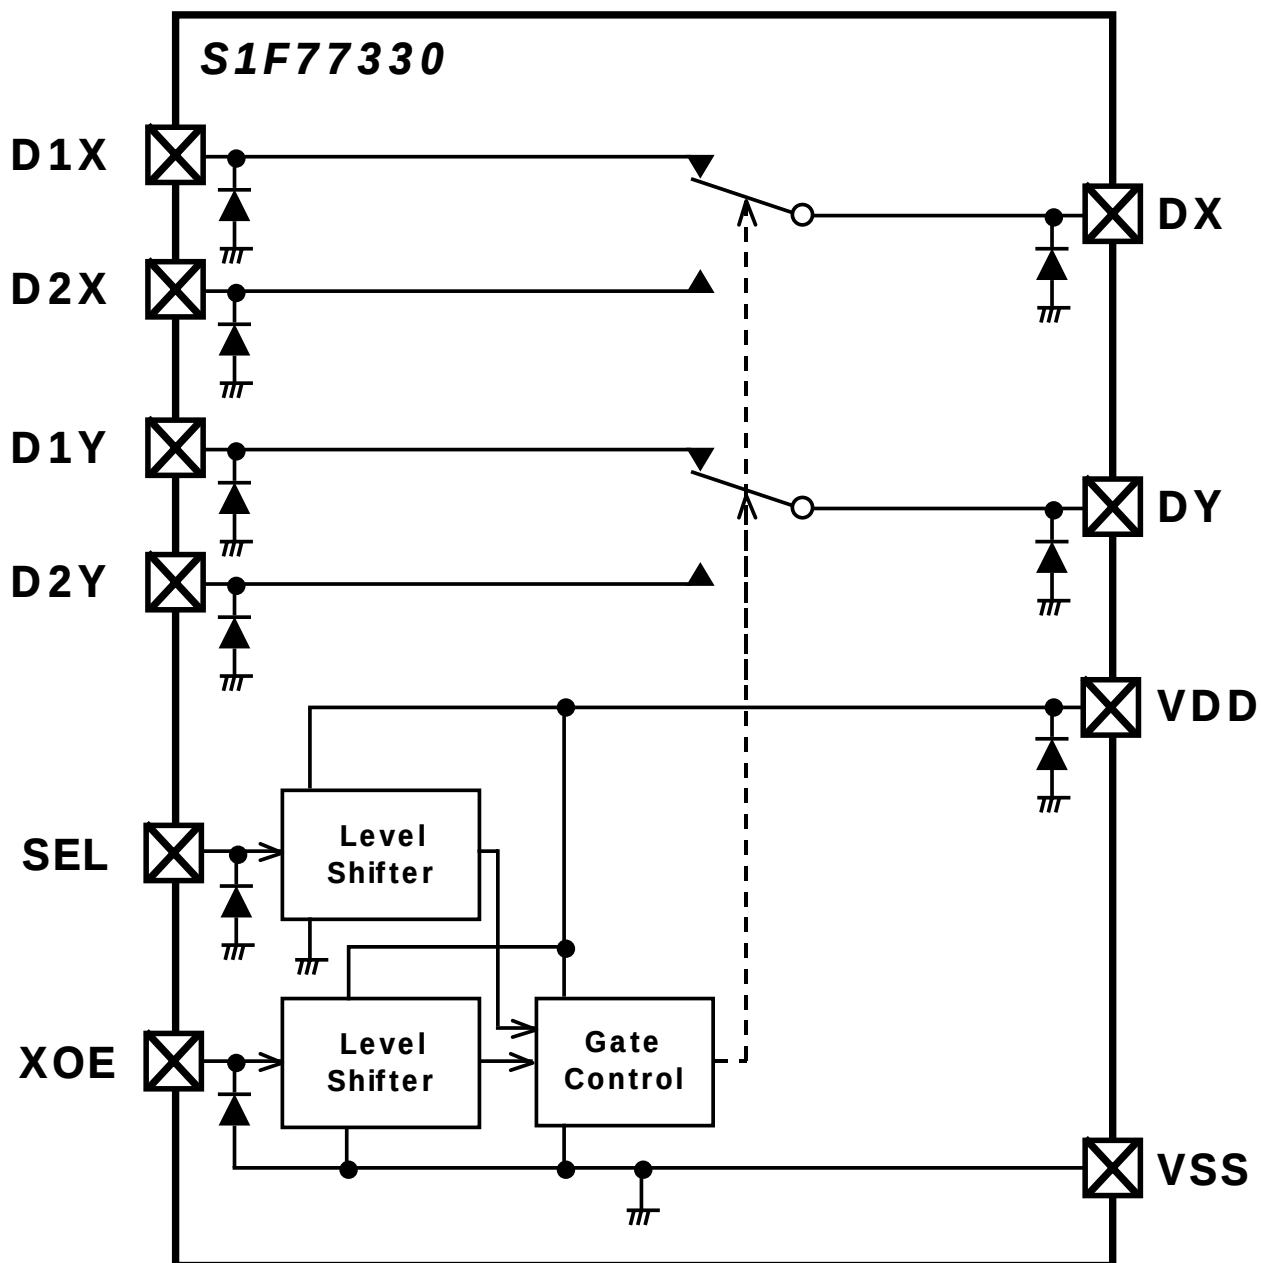

S1F77330 Series

■ ELECTRICAL CHARACTERISTICS

■ ABSOLUTE MAXIMUM RATINGS

Item		Symbol	Min.	Max.	Unit
Supply voltage		V _{DD}	-0.3	4.6	V
Input pin voltage	XOE, SEL	V _{IN}	-0.3	7.0	V
Switch input voltage	D1X,D2X,D1Y,D2Y,DX,DY	V _{SW}	-0.3	7.0	V
Storage temperature		T _{STG}	-65	150	°C

■ RECOMMENDED OPERATING CONDITIONS

Item		Symbol	Min.	Max.	Unit
Supply voltage		V _{DD}	3.0	3.6	V
Input pin voltage	XOE,SEL	V _{IN}	0.0	5.5	V
Switch input voltage	D1X,D2X,D1Y,D2Y,DX,DY	V _{SW}	0.0	5.5	V
Operating temperature		T _a	-40	85	°C

■ DC ELECTRICAL CHARACTERISTICS

(Without protrusion: T_a = -40°C to 85°C)

Item	Symbol	Conditions	V _{DD} [V]	Min.	Typ.	Max.	Unit
Clamp diode voltage	V _{IK}	I _L =18mA	3.0			-1.2	V
High Level Input voltage	V _{IH}		3.0 to 3.6	1.2			V
Low Level Input voltage	V _{IL}		3.0 to 3.6			0.4	V
Input pin leak	I _{IN}	0V ≤ V _{IN} ≤ V _{CC}	3.6	-1.0		1.0	μA
Switch off leak	I _{OZ}	0V ≤ V _{SW} ≤ V _{CC}	3.6	-1.0		1.0	μA
Power off Leakage current (DX, DY)	I _{OFF}	0V ≤ V _{SW} ≤ V _{CC} , V _{CC} =0V	0.0	-2.0		2.0	μA
Switch ON resistance	R _{ON}	V _{SW} =0.4V, I _{ON} = -8mA	3.0		6.0	9.0	Ω
ΔON resistance	ΔR _{ON}	V _{SW} =0.4V, I _{ON} = -8mA	3.0		0.35		Ω
ON resistance flatness	R _{ON} (Flat)	0V ≤ V _{SW} ≤ 1V, I _{ON} = -8mA	3.0		2.0		Ω
Quiescent current	I _{CC}	V _{IN} =3.6V	3.6			1.0	μA
Current consumption	I _{CCT}	V _{IN} =0V, V _{SW} =2.6V	3.6			14.0	μA

* Describe the value based on the USB full speed standard.

S1F77330 Series

■ AC ELECTRICAL CHARACTERISTICS

(Without protrusion:Ta= -40°C to 85°C)

Item	Symbol	Conditions	V _{DD} [V]	Min.	Typ.	Max.	Unit
Turn ON Time	t _{ON}	R _L =50Ω, C _L =5pF	3.0 to 3.6		5	21	μs
Turn OFF Time	t _{OFF}	R _L =50Ω, C _L =5pF	3.0 to 3.6		23	50	ns
Propagation Delay	t _{PD}	R _L =50Ω, C _L =5pF	3.3		0.25		ns
OFF Isolation	O _{IRR}	R _L =50Ω, C _L =0pF, f=240MHz	3.0 to 3.6		-34		dB
Crosstalk	X _{talk}	R _L =50Ω, f=240MHz	3.0 to 3.6		-30		dB
-3dB Bandwidth	BW	R _L =50Ω, C _L =0pF, f=240MHz	3.0 to 3.6		900		MHz
Channel to Channel Skew	t _{SK(O)}	R _L =50Ω, C _L =5pF	3.0 to 3.6		50		ps
Skew of Opposite Transitions of the Same Output	t _{SK(P)}	R _L =50Ω, C _L =5pF	3.0 to 3.6		20		ps
Total Jitter	t _j	R _L =50Ω, C _L =5pF, t _r =t _f =500ps at 480Mbps	3.0 to 3.6		200		ps

■ CAPACITANCE

(Without protrusion:Ta= -40°C to 85°C)

Item	Symbol	Conditions	V _{DD} [V]	Min.	Typ.	Max.	Unit
Control input pin capacitance	C _{IN}	V _{DD} =0V, f=1MHz	0.0		7.0		pF
Bus switch ON capacitance	C _{ON}	V _{IN} =0V, f=1MHz	3.3		4.4		pF
Bus switch OFF capacitance1 (D1X, D1Y, D2X, D2Y)	C _{OFF1}	V _{DD} =0V, f=1MHz	0.0		1.45		pF
Bus switch OFF capacitance2 (DX, DY)	C _{OFF2}	V _{DD} =0V, f=1MHz	0.0		2.7		pF

S1F77330 Series

NOTICE:

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©Seiko Epson Corporation 2010, All rights reserved.

SEIKO EPSON CORPORATION

SEMICONDUCTOR OPERATIONS DIVISION

EPSON semiconductor website

http://www.epson.jp/device/semicon_e/

IC Sales Department

IC International Sales Group

421-8 Hino, Hino-shi, Tokyo 191-8501, JAPAN

Phone: +81-42-587-5814 FAX: +81-42-587-5117

Document code: 411664701

First issue January, 2009

Revised February, 2010 in Japan